



DEVIKRUPA ELECTRONICS

1st Floor, Raj Avenue, 17, Maninagar Society, Opp. Gopal Tower,
Maninagar, AHMEDABAD - 380 008. GUJARAT, INDIA.
Phone : +91 79 2545 0400 **Fax** : +91 79 2546 9555
Email : sales@devikrupa.com **Web** : www.devikrupa.com



Specifications of N (M) 1/2" RF Connector

1. N (M) 1/2" RF Connector is in accordance with IEC60169-16: 1982
2. Male interface screw thread: 5/8-24UNEF-2B
3. Material and plating

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Nickel plated	5 μ
Connecting nut	Brass (HPb59-1)	Nickel plated	5 μ
Stop ring	Bronze		
Collar	Brass (HPb59-1)	Nickel plated	5 μ
Sealing	Silicone rubber		
End cover	PTEF (SFX-1)	Silver plated	5 μ
Probe	Bronze(QSn6.5-0.1)		5 μ
Guide	Brass (HPb59-1)	Nickel plated	5 μ
Insulator	PTEF (SFX-1)		
Clamp	Brass (HPb59-1)	Nickel plated	7 μ

- 4 Working environment : Working temperature : -40~+85°
Relative moisture : 90%~95% (Temperature: 40 \pm 2°C)
Atmospheric pressure: (70~106)KPa




DEVIKRUPA ELECTRONICS

1st Floor, Raj Avenue, 17, Maninagar Society, Opp. Gopal Tower,
Maninagar, AHMEDABAD - 380 008. GUJARAT, INDIA.
Phone : +91 79 2545 0400 **Fax** : +91 79 2546 9555
Email : sales@devikrupa.com **Web** : www.devikrupa.com



5. Dimensions:

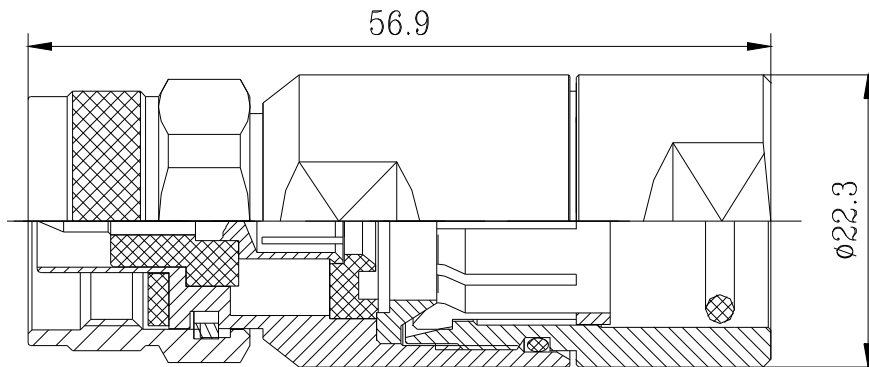

6. Mechanical characteristics

Contact resistance (mΩ)	Inner conductor	≤1
	Outer conductor	≤0.25
Insulation resistance (MΩ)		≥10 ⁴
Withstanding voltage AC(V/min)		2500
VSWR(0 ~ 2GHz)		≤1.1

7 When results tested by different analyzers are different should adopt the HP testing device as criteria.